

BLACK HORSE

Road & Forestry Trailers



2026/2027

PRODUCT CATALOGUE



355 Development Drive
Prescott, ON K0E 1T0



888-989-3717



www.blackhorsetrailers.ca

ABOUT US

Half a century of forestry expertise, one family, and a horse named Gulliver — the story behind the equipment.

Black Horse Road and Forestry Trailers Inc., a sister company of Blacks Creek Innovations Inc., brings together over half a century of experience in agriculture and forestry.

Sheldon Gilmer, owner of Blacks Creek, comes from an agricultural background with extensive forestry experience. After the ice storm of 1998, he built his first firewood processor. He understood the need for equipment that was durable, well-built, affordable and designed to minimize downtime.

As Blacks Creek grew, the company expanded beyond firewood processors to offer complementary forestry equipment, including trailers and log loaders manufactured by another company. Years of selling this equipment and listening to customer feedback gave the team firsthand knowledge of what worked and what could be improved.

In 2022, Blacks Creek moved into a new manufacturing facility in Prescott, Ontario. With increased manufacturing capabilities and years of industry experience, the team began designing and building its own line of forestry trailers and log loaders, incorporating the features and improvements customers had been asking for. Black Horse Road and Forestry Trailers was born.

Richinda Bates, Operations & Sales for Black Horse, lives with her husband and two daughters on their sixth-generation farm, where the family bred and raised Percheron horses. Her father-in-law, Jack, trained the horses to pull cultivators, haul logs from the bush and gather firewood by horse-drawn sleigh.

In the spring of 2008, the last Percheron bred and raised on the Bates farm was born. His name was Gulliver. His strength, dependability and ability to work in the timber industry inspired the name Black Horse.



ATV TRAILER

9' log loader with 360° rotation, 1,800 lb half-boom capacity
— the compact entry point for towing behind ATVs, Argos, and small tractors.

SPECIFICATIONS

- 3,500 Capacity
- 8' x 3' Loading Surface
- 25" x 12" x 10" Agricultural Tires
- Hydraulic Tandem

OPTIONS

- Hydraulic Winch : 100' Synthetic Cable
- Power on Demand



HYDRAULIC LOG LOADERS

Built tough to handle the most demanding tasks, maneuvering logs and other items with incredible precision — engineered for any logging operation or heavy lift.

STANDARD FEATURES

- Honda power pack with hydraulic oil reservoir, filter & sight glass
- Joystick with thumb controls to open/close grapple clam
- Heavy-duty hydraulic stabilizers
- 400° log loader rotation
- 360° continuous grapple rotation
- Operator's Seat: Swings with log loader

OPTIONS

- 15 Gallon Hydraulic Reservoir
- Debris Bucket
- Hydraulic Winch, 100' Synthetic Cable with 4,000lbs capacity - Wireless remote available
- Tractor Mount Brackets
- Radio Controlled Wireless Log Loader

MODEL COMPARISON

MODEL	LENGTH	HALF BOOM CAPACITY IN LBS	FULL BOOM CAPACITY IN LBS
LG-931	9'	1,800	950
LG-1131	11'	2,100	1,600
LG-1336	13'	1,950	1,100
LG-1548	15'	2,900	2,000
LG-1748	17'	2,300	1,300
LG-1948	19'	3,000	2,100
LG-2156	21'	4,000	3,500
LG-2356	23'	3,500	3,000



LG-2356 with optional hydraulic winch.



Model LTR820-20K with LG-2356 log loader in custom red, and optional spare tire, winch, and dumping platform.

FORESTRY TRAILERS

Double pole trailers built for rugged forestry work with either a tractor or a truck
— pair with a hydraulic log loader powered by your tractor or an optional Honda power pack.

Available Options: Articulated tongue, hydraulic adjustable tandem, electric brakes, road lights & tires.

MODEL COMPARISON

MODEL	TONNAGE	SUGGESTED TRACTOR	LOADING SURFACE	TANDEM
LTX2-1.75	1.75	ATV OR SMALL TRACTOR	8' X 3'	ADJUSTABLE
LTX2-3.0	3	30HP	9' X 5'	FIXED
LTX2-5.0	5	50HP	11' X 6' 4"	FIXED
LTX2-7.0	7	75HP	12' X 6'	FIXED
LTX2-12.0	12	100HP	15' X 6'	FIXED



ROAD FORESTRY TRAILERS

Built to endure the toughest logging and forestry environments
— pintle or ball hitch, 14-ply road tires, electric brakes, LED lights, 8 bunks.

Available Options: Aluminum toolbox, aluminum ramps, gooseneck hitch, J-class tires, spare tire, wooden deck.

MODEL COMPARISON

MODEL	DECK SIZE	GVWR (LBS)	RATING PER AXLES (LBS)
LTR710-14K	7' X 10'	14,000	7,000
LTR716-14K	7' X 16'	14,000	7,000
LTR720-16K	7' X 20'	16,000	8,000
LTR720-20K	7' X 20'	20,000	10,000
LTR820-20K	8' X 20'	20,000	10,000
LTR820-24K	8' X 20'	24,000	12,000
LTR820-30K	8' X 20'	30,000	15,000
LTR824-30K	8' X 24'	30,000	15,000

*20, 24 & 30k axles have double tires.



DUMP TRAILERS

Black Horse Hydraulic Dump Trailers are the ultimate solution for heavy-duty hauling — pintle or ball hitch, 2' metal sides, a three-stage dump cylinder, interior D-rings, barn door tailgates, LED lights, and a backup alarm, built for arborists, firewood producers, and tree removal crews.

Available Options: Side Extensions (steel or mesh), aluminum ramps, aluminum toolbox, gooseneck hitch, hinged sides, J-class tires, tarp, wooden floor.

MODEL COMPARISON

	MODEL	BOX SIZE	GVWR (LBS)	RATING PER AXLES (LBS)
10' TRAILERS	LTD610-14K	6' X 10'	14,000	7,000
12' TRAILERS	LTD612-14K	6' X 12'	14,000	7,000
14' TRAILERS	LTD714-14K	7' X 14'	14,000	7,000
	LTD714-16K	7' X 14'	16,000	8,000
16' TRAILERS	LTD716-20K	7' X 16'	20,000	10,000
	LTD816-20K	8' X 16'	20,000	10,000
20' TRAILERS	LTD720-20K	7' X 20'	20,000	10,000
	LTD820-20K	8' X 20'	20,000	10,000
	LTD820-24K	8' x 20'	24,000	12,000
	LTD820-30K	8' x 20'	30,000	15,000
24' TRAILERS	LTD824-30K	8' x 24'	30,000	15,000

*20, 24 & 30k axles have double tires.





Model LTDG824-30K with optional 2' wire mesh side extensions, LG-2156 log loader with operators platform, Honda power pack & gooseneck hitch.



Model LTD824-30K with optional 6' solid steel side extensions, LG-2356 log loader with operators platform and Honda power pack.



THE EXCEPTIONAL EQUIPMENT FOR SPLITTING WOOD WITH AN EXCAVATOR!

What is the most important factor in keeping your costs down and profits up? Productivity. The firewood business is back-breaking work and if you're injured or exhausted, the work doesn't get done. If your equipment can't stand up to the punishment, you have to deal with downtime and repairs which cost you both time and money.

At Blacks Creek, we know the firewood business. We invest heavily into designing and testing the right tools for the job with a goal of maximizing your firewood productivity, with equipment that will last generations. We started the company with the goal of improving people's lives. Every innovation is designed for maximum output and durability. For you, that means less risk of down-time, hardware that stands up to heavy use, and features that let you do the work of many without the need for additional assistance.

As part of our commitment to providing only the highest quality equipment, we have chosen Black Splitter hydraulic cone splitters & attachments to complement our lineup of timber processing equipment. Due to their exceptional German engineering and robust construction, Black Splitter hydraulic wood-splitting attachments and accessories have earned acclaim for their superior quality from industry professionals and private customers around the world.

Black Splitter attachments are manufactured and designed to fit excavators on the 0.8 to 40 metric ton weight class. From splitting large timber, grinding stumps, washing gravel or sieving topsoil, auguring holes, mixing cement, breaking up soil or preparing forest floors for reforestation, Black Splitter has the attachments to meet and exceed your needs; all without ever having to leave the seat of your machine.

Blacks Creek is your Canadian dealer of Black Splitter hydraulic cone splitters & attachments. Visit blacks creek.ca today to view our complete product line of firewood and timber processing equipment. If you have any special requirements, our team is always eager to come up with innovative ways to help you succeed.

Blacks Creek Innovations Inc.
(888) 989-3717
www.blacks creek.ca



BLACK SPLITTER - S1 / S1X SERIES

S1 630



Excavator Size (Metric Tons)	0.8 - 6
Weight (kg)	106
Weight (lb)	235
Cone - Thread	Chromium Steel Tip - Double Shear Thread
Cone - Number of Parts	2
Cone Diameter / Thread Pitch (mm)	200 / 24
Cone Diameter / Thread Pitch (in)	7.9 / 0.95
Hydraulic Motor	630
Inlet Pressure (bar)	180 - 240
Inlet Pressure (psi)	2,610 - 3,480
Maximum Flow Rate (l/min)	200
Maximum Flow Rate (us gal/min)	52.8
Maximum Torque (Nm)	2,338
Maximum Torque (ft/lb)	1,724
Motor Shaft Diameter (mm)	100
Motor Shaft Diameter (in)	3.9
Notes	Motor Shaft Made of Special Steel - Bearing is Mounted and Sealed

S1X 800+



Excavator Size (Metric Tons)	6 - 18
Weight (kg)	208
Weight (lb)	457.6
Cone - Thread	Chromium Steel - Double Shear Thread
Cone - Number of Parts	2
Cone Diameter / Thread Pitch (mm)	9.65 / 0.95
Cone Diameter / Thread Pitch (in)	245 / 24
Hydraulic Motor	800+
Inlet Pressure (bar)	180 - 370
Inlet Pressure (psi)	2,610 - 5,365
Maximum Flow Rate (l/min)	200
Maximum Flow Rate (us gal/min)	52.8
Maximum Torque (Nm)	4,020
Maximum Torque (ft/lb)	2,965
Motor Shaft Diameter (mm)	120
Motor Shaft Diameter (in)	4.7
Notes	Motor Shaft Made of Special Steel - Bearing is Mounted and Sealed Motor Must be Connected to a Motor Care Drain Line
Backplate Included (S1 - S2)	N - N/A
Hydraulic Hoses Included (S1 & S2)	N

BLACK SPLITTER - S1 630 / S1X 800+ WITH UPGRADED CONE



S1 630

S1X 800+

Upgraded to - Complete Chromium Steel Cone (mm)	200	
Upgraded to - Complete Chromium Steel Cone (in)	7.9	
Upgraded Size - Complete Chromium Steel (mm)		300
Upgraded Size - Complete Chromium Steel (in)		11.8

BLACK SPLITTER - S2 / S2X SERIES



S2 630

S2 800

S2 800+

Excavator Size (Metric Tons)	1 - 6		
Weight (kg)	119 - 128		
Weight (lb)	261 - 282		
Cone - Thread	Chromium Steel - Double Shear Thread		
Cone - Number of Parts	2		
Cone Diameter / Thread Pitch (mm)	200 / 24		
Cone Diameter / Thread Pitch (in)	7.9 / 0.95		
Hydraulic Motor	630	800	800+
Inlet Pressure (bar)	180 - 240		180 - 370
Inlet Pressure (psi)	2,610 - 3,480		2,610 - 5,365
Minimum Flow Rate (l/min)	20	40	50
Minimum Flow Rate (us gal/min)	5.5	10.5	13
Maximum Torque (Nm)	2,338	2,475	4,020
Maximum Torque (ft/lb)	1,724	1,819	2,965
Motor Shaft Diameter (mm)	100		
Motor Shaft Diameter (in)	3.9		
Notes	N/A	N/A	Must be connected to a motor case drain line
Motor Shaft Made of Special Steel - Bearing is Mounted and Sealed			



S2X 630

S2X 800

S2X 800+

Excavator Size (Metric Tons)	8 - 10		
Weight (kg)	152 - 161		
Weight (lb)	334 - 354		
Cone - Thread	Chromium Steel - Double Shear Thread		
Cone - Number of Parts	2		
Cone Diameter / Thread Pitch (mm)	245 / 24		
Cone Diameter / Thread Pitch (in)	9.65 / 0.95		
Hydraulic Motor	630	800	800+
Inlet Pressure (bar)	180 - 240		180 - 370
Inlet Pressure (psi)	2,610 - 3,480		2,610 - 5,365
Maximum Flow Rate (l/min)	20 / 200	40 / 200	50 / 200
Maximum Flow Rate (us gal/min)	5.5 / 52.8	10.5 / 52.8	13 / 52.8
Maximum Torque (Nm)	2,338	2,475	4,020
Maximum Torque (ft/lb)	1,724	1,819	2,965
Motor Shaft Diameter (mm)	100		
Motor Shaft Diameter (in)	3.9		
Notes	N/A	N/A	Must be connected to a motor case drain line
Motor Shaft Made of Special Steel - Bearing is Mounted and Sealed			

BLACK SPLITTER- S2 / S2X 800+ SPECIAL FITTINGS

Cone Splitter	S2 800+	S2X 800+
Optional Sizes	15L, 18L, 22L	

BLACK SPLITTER - SG1

DIRECT MOTOR-DRIVEN WITH GRAB ARMS



	SG1 630 1 Control	SG1 630 2 Controls	SG1 800 1 Control	SG1 800 2 Control
Excavator Size (Metric Tons)	1.6 - 6			
Weight (kg)	116 - 178			
Weight (lb)	365 - 392			
Cone - Thread	Chromium Steel - Double Shear Thread			
Cone - Number of Parts	2			
Cone Diameter / Thread Pitch (mm)	200 / 24			
Cone Diameter / Thread Pitch (In)	7.9 / 0.95			
Hydraulic Motor	630	630	800	800
Inlet Pressure (psi)	2,610 - 3,480			
Inlet Pressure (bar)	180 - 240			
Maximum Flow Rate (l/min)	200		200	
Maximum Flow Rate (us gal/min)	52.8		52.8	
Maximum Torque (ft/lb)	2,338		2,475	
Maximum Torque (Nm)	1,724		1,819	
Motor Shaft Diameter (mm)	100			
Motor Shaft Diameter (In)	3.9			
Compressive Force - Hydraulic Cylinder (# x kg)	2 x 3,500			
Compressive Force - Hydraulic Cylinder (# x lb)	2 x 7,716			
Notes	For 1 control circuit, a motor case drain line and a control cable are needed	N/A	For 1 control circuit, a motor case drain line and a control cable are needed	N/A

BLACK SPLITTER - REGULAR SERIES CONES



	CONE TIP	CONE	CONE	CONE	CONE	CONE ACCESSORIES
Cone - Thread	Chromium	Steel - Double Shear	Chromium - Double Shear	Chromium - Double Shear	Chromium - Double Shear	Parallel Key / Lock Washer
Pitch (mm) / (In)		48 / 1.9				Bolt M16
Diameter(mm)/(In)		200 / 7.9		245 / 9.7	300 / 11.8	Machined Washer



	CONE COMPLETE	CONE COMPLETE	CONE COMPLETE	CONE COMPLETE	CONE UPGRADE	CONE UPGRADE
Cone - Thread	Steel - Double Shear	Chromium - Double Shear	Chromium - Double Shear	Chromium - Double Shear	Chromium - Double Shear	Chromium - Double Shear
Pitch (mm) / (In)	24 / 0.94					
# of Pieces	2					
Diameter(mm)/(In)	200 / 7.9		245 / 9.7	300 / 11.8	200 - 245 / 7.9 to 9.7	245 to 300 / 9.7 to 11.8

CONE SPLITTER - CONES

BLACK SPLITTER - EXTREME SERIES CONES



	CONE TIP	CONE	CONE	CONE COMPLETE	CONE COMPLETE	CONE ACCESSORIES
Cone - Thread	Chromium	Chromium - Quadruple Shear	Chromium - Quadruple Shear	Chromium - Quadruple Shear	Chromium - Quadruple Shear	Parallel Key / Lock Washer
Pitch (mm) / (In)		48 / 1.9				Bolt M16
# of Pieces	1	2				Machined Washer
Diameter(mm)/(In)		300 / 11.8	Extension 400 / 15.8	300 / 11.8	400 / 15.8	4 Parallel Keys & Screws

BLACK SPLITTER - AUGER ADAPTERS & ADD-ON ACCESSORIES



**STRAIGHT
ADAPTER**

**STRAIGHT
ADAPTER**

**PLANT
AUGER
ADAPTER**

**UNIVERSAL
JOINT
ADAPTER**

**UNIVERSAL
JOINT
ADAPTER**

**REINFORCED
STRAIGHT
ADAPTER
(> 12,000 Nm)**

Connection

Hex SW 41 Socket

Stihl Auger BT 360

Hex SW 41 Socket

Hex SW 41 Socket

Stihl Auger BT 360

Hex SW 41 Socket



ADAPTER PLATE



RAKE WITH 5 PRONGS



RAKE WITH 7 PRONGS



GARDEN CLAW

Fits Cone Splitter

S2

S2

S2

S2

Steel Type

Hardox

Hardox

Notes

Adapter enables other accessories to be bolted onto the machine

Rake can be bolted to the add-on adapter plate in both directions

Rake can be bolted to the add-on adapter plate in both directions

Depending on the direction of rotation, both claws press against the rail and rotate independently while revolving together around the machine.



**MIXING
DRUM**



**SCREENING
BASKET**



**STEEL
BROOM**



**STEEL
BROOM**



**STEEL BROOM
REPLACEMENT
BRUSH**

Fits Cone Splitter

All

Size (l)

165

Size (g)

36.3

Diameter (mm)

500 x 700

950

750

Diameter (in)

19.7 x 27.6

37.4

29.5

of Brushes

64


32

1



BLACK SPLITTER - SB / SBX / SBXX SERIES

SB
3-12 Metric Tons
SBX
12-28 Metric Tons
SBXX
25-40 Metric Tons



SB



SBX



SBXX

Excavator Size (Metric Tons)	3 - 12	12 - 28	25 - 40
Weight (kg)	270	635	890
Weight (lb)	594	1,397	1,958
Cone - Thread	Chromium Steel - Quadruple Helix Thread	Chromium Steel - Quadruple Helix Thread	Chromium Steel - Quadruple Helix Thread
Cone - Number of Parts	2	3	3
Cone Diameter / Thread Pitch (mm)	300 / 48	400 / 48	400 / 48
Cone Diameter / Thread Pitch (in)	11.8 / 1.9	15.7 / 1.9	15.7 / 1.9
Hydraulic Motor	Planetary Gear	Planetary Gear	Planetary Gear
Motor Drive Shaft	100 mm diameter bearing-mounted and sealed	130 mm diameter bearing-mounted and sealed	170 mm diameter bearing-mounted and sealed
Maximum Inlet Pressure (bar)	180 - 240	350	340
Maximum Inlet Pressure (psi)	2,610 - 3,480	5,076	4,931
Maximum Flow Rate (l/min)	200	268	424
Maximum Flow Rate (us gal/min)	52.8	70.8	112
Maximum Torque (Nm)	12,000	30,000	60,000
Maximum Torque (ft/lb)	16,272	40,680	81,360
Motor Shaft Diameter (mm)	120	130	170
Motor Shaft Diameter (in)	4.7	5.1	2.8
Notes	N/A	A motor case drain line and a control cable are required	A motor case drain line and a control cable are required
Excavator Bracket Included	N	N	N
Hydraulic Hoses Included	N	N	N

BLACK SPLITTER - AUGERS ATTACHMENTS



**AUGER WITH
TUNGSTEN CARBIDE
TEETH**

**AUGER WITH
TUNGSTEN CARBIDE
TEETH**

**AUGER WITH
TUNGSTEN CARBIDE
TEETH**

Fits Cone Splitter	All	All	All
Diameter (mm)	100	200	300
Diameter (in)	3.9	7.9	11.8
Shaft Diameter (mm)	60.3 x 8		
Shaft Diameter (in)	2.4 x 0.31		
Socket	Hex SW 41mm		
Spiral Conveyor Pitch / Thickness (mm)	100 / 8		
Spiral Conveyor Pitch / Thickness (in)	3.9 / 0.31		
Effective Length (mm)	1,000		
Effective length (in)	39.37		
Cutting Blades & Pilot Point Replaceable	Yes		
Auger Extension Available upon Request	Yes		
Note	Bore Head double-edged, hardened and equipped with Flat Teeth type FZ38-HM		

BLACK SPLITTER - AUGERS ATTACHMENTS



	AUGER WITH TUNGSTEN CARBIDE TEETH	AUGER WITH TUNGSTEN CARBIDE TEETH	AUGER WITH TUNGSTEN CARBIDE TEETH
	MSRP \$2,399	MSRP \$2,599	MSRP \$2,799
Fits Cone Splitter	All	All	All
Diameter (mm)	100	200	300
Diameter (in)	3.9	7.9	11.8
Shaft Diameter (mm)	60.3 x 8		
Shaft Diameter (in)	2.4 x 0.31		
Socket	Hex SW 41mm		
Spiral Conveyor Pitch / Thickness (mm)	100 / 8		
Spiral Conveyor Pitch / Thickness (in)	3.9 / 0.31		
Effective Length (mm)	1,000		
Effective length (in)	39.37		
CuttingBlades&PilotPoint Replaceable	Yes		
Auger Extension Available upon Request	Yes		
Note	Bore Head double-edged, hardened and equipped with Flat Teeth type FZ38-HM		



	AUGER WITH CUTTING BLADE	AUGER WITH CUTTING BLADE	AUGER WITH CUTTING BLADE	AUGER WITH CUTTING BLADE
	MSRP \$1,899	MSRP \$1,999	MSRP \$2,199	MSRP \$2,399
Fits Cone Splitter	All	All	All	All
Diameter (mm)	100	200	300	400 (Length 500)
Diameter (in)	3.9	7.9	11.8	15.7 (Length 19.7)
Shaft Diameter (mm)	60.3 x 8			
Shaft Diameter (in)	2.4 x 0.31			
Socket	Hex SW 41mm			
Spiral Conveyor Pitch / Thickness (mm)	100 / 8			
Spiral Conveyor Pitch / Thickness (in)	3.9 / 0.31			
Effective Length (mm)	1,000			
Effective length (in)	39.37			
CuttingBlades&PilotPoint Replaceable	Yes			
Auger Extension Available upon Request	Yes			
Note	Bore Head double-edged, hardened and reinforced.			



	PLANT AUGER
	MSRP \$2,399
Fits Cone Splitter	All
Diameter (mm)	400 (Length 500)
Diameter (in)	15.7 (Length 19.7)

— KEEP TRACK

NOTES


Use this section to keep track of products you're interested in.

[illegible]

WHY BLACKS CREEK?

From a water-powered sawmill in Heckston to a name that's carried the family's connection to timber for generations.

Sheldon Gilmer, the proprietor of Blacks Creek, hails from a lineage deeply rooted in Heckston, Ontario, Canada. His upbringing was filled with traditional farm activities like horseback riding, snowmobiling, and hunting, complemented by the seasonal rhythm of cutting firewood and logging lumber during winters. The forest became Sheldon's sanctuary, a serene retreat amidst the bustle of rural life.

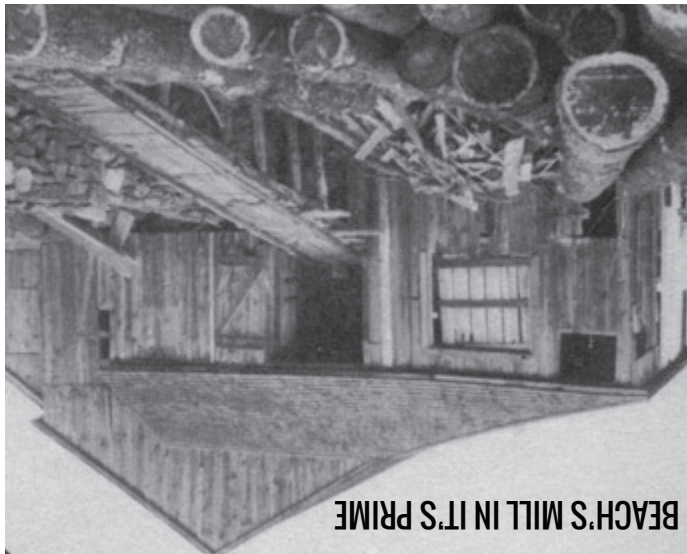

BEACH'S MILL IN IT'S PRIME

In 1982, Sheldon made a pivotal decision to acquire his grandfather's property, nestled near the historic Beach's Mill, a water-powered sawmill that had been an integral part of his family's heritage for generations. The stream that powered the mill had borne various names over the years, including the historic name of Blacks Creek. When contemplating a name for their business venture, Sheldon and his wife and business partner, Stephanie, felt compelled to honor this rich history.



BEACH'S MILL ON DISPLAY AT UPPER CANADA VILLAGE

OUR CUSTOMERS

Blacks Creek customers are the salt of the earth type of people. We are privileged to work with people from many walks of life — farmers, outdoors people and homesteaders, all sharing a common love of firewood and the way of life it represents.

OUR OTHER PASSIONS



Sheldon and Stephanie have spent 40 years working in partnership with community development groups in remote African communities — promoting agro-forestry for sustainable agriculture, responsible harvesting of timber for critical community needs, and developing small water power sites for milling corn, cassava, coffee and palm oil.

FIREWOOD TUMBLER

48" drum, 9' length


— tumbles split firewood clean of dirt, bark, sawdust, and wood fragments before it's packaged or delivered.

SPECIFICATIONS

- 48" Drum
- 9' Drum Length
- 2" Bar Spacing - Custom available
- Height Adjustable Legs
- Hydraulic Motor Drive
- In-Feed Chute
- Out-Feed Chute
- Forklift Pockets

OPTIONS

- 8' In-Feed Conveyor for Skid steer loading
- 8' Out-Feed Conveyor
- 1.5HP Electric Motor
- Extended Drum Sections - 2'
- GX270 Honda Power Pack
- Optional Yard Tires - Not road worthy

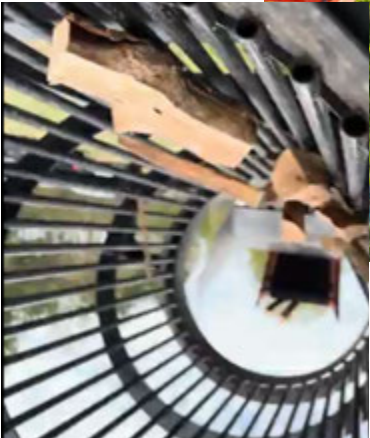

2500 With Attached 6' Live Deck



LOG DECKS

Chain-conveyor decks that feed logs to your processor at the push of a lever — supported by adjustable legs and forklift pockets for easy moving, with a 16' maximum log length. Optional live rollers.

MODEL	WIDTH x LENGTH	# of RAILS
LD - 66	6' x 6'	2
LD - 68	6' x 8'	2
LD - 610	6' x 10'	2
LD - 612 AT	6' x 12'	2
LD - 107 AT	10' x 7'	3
OPTIONS		
• Rollers for all models		

Photo Descriptions

- Top Left: Model LD-610 Shown with Model 2500
- Bottom Left: Model LD-68 with Optional Live Rollers
- Top Right: Model LD-610
- Bottom Right: Model LD-68 Shown with Model 1250



MATERIAL CONVEYORS

Built with a heavy steel frame and powered by a Honda 3.2 HP engine, hydraulic motor, or electric motor — Blacks Creek conveyors take the lifting out of firewood production, and handle hay, mulch, and similar materials just as well. (Not rated for aggregates.)

MODEL	LENGTH TO MAX HEIGHT
1640	16' → 8'
2040	20' → 10'
2440	24' → 12'
3040	30' → 15'
OPTIONS	
•	Aluminum Cleats
•	Trash Rack with Tray



Photo Descriptions

- Right Page, Bottom Left: Model 2040 Shown with Optional Trash Rack & Tray
- Right Page, Top Right: Model 2040 Shown with Optional Cleats





Model 1640: 16' Conveyor

HYDRAULIC LOG SPLITTERS

13 to 22 HP Honda engines, 4" to 5" splitting cylinders — four capacities built to match any firewood operation, from weekend cords to commercial output.

MODEL 20T-P

• 13 HP Honda Engine
• Hydraulic Pump - 2-stage 22/6 GPM
• 12 Gallon Hydraulic Oil Reservoir
• 4" x 24" Splitting Cylinder
• Four-way Hydraulic Wedge
• Out-Feed Trash Rack
• 12" Highway Tires

HEAVY DUTY MODELS —

MODEL 20T-HD

• 13 HP Honda Engine - Electric Start
• Hydraulic Pump - 2-stage 22/6 GPM
• 32 Gallon Hydraulic Oil Reservoir
• 4" x 24" Splitting Cylinder
• Four-way Hydraulic Wedge
• Out-Feed Trash Rack
• 15" Highway Tires with Fenders

MODEL 30T-P

• 22HP Honda Engine - Electric Start
• Hydraulic Pump - 2-stage 28/6 GPM
• 12 Gallon Hydraulic Oil Reservoir
• 5" x 24" Splitting Cylinder
• Four-way Hydraulic Wedge
• Out-Feed Trash Rack
• 12" Highway Tires

MODEL 30T-HD

• 22HP Honda Engine - Electric Start
• Hydraulic Pump - 2-stage 28/6 GPM
• 32 Gallon Hydraulic Oil Reservoir
• 5" x 24" Splitting Cylinder
• Four-way Hydraulic Wedge
• Out-Feed Trash Rack
• 15" Highway Tires with Fenders

OPTIONS FOR ALL SPLITTERS

• Electric Start
• Hydraulic Block Lift
• 36" Splitting Length
• Auto-Cycle with Quick Return
• Six-way Wedge



MODEL 3000

49 HP Doosan diesel engine, 25" maximum log diameter, up to 22' length of log — the top of the lineup, built for all-day commercial production.

SPECIFICATIONS

• 49 HP Doosan Diesel Engine
• Triple Hydraulic Pump with Oil Cooler - 34/22/6 GPM
• 50 Gallon Hydraulic Reservoir with Sight & Temp Gauge
• 5" x 24" Splitting Cylinder
• 25" Bar and .063" Gauge, 3/8" Chain
• 25" Maximum Log Diameter
• Automatic Electric Saw Chain Lubrication
• Up to 22' Length of Log
• 16' In-Feed Hydraulic Chain Log Deck
• Adjustable Hydraulic Four-way Wedge
• Hydraulic Log Clamp, Saw Sweep & Log Stop
• Splitter Auto-Cycle
• Firewood Cut-off Lengths, Adjustable in 2" Increments, 12" to 24"
• Integrated Trash Rack
• Torsion Axle, Lights/Electric Brakes

OPTIONS

• 36" Firewood Cut-off Length
• Six-way Wedge
• Eight-way Wedge
• Live Log Deck, 10' x 7' attached
• Attached Out-feed Conveyor 12' or 14'
• Operator's Seat



3000 Processor is shown with optional attached live deck and stand alone conveyor.

MODEL 2500

35 HP Briggs and Stratton engine, 23" maximum log diameter — high-output production, fully hydraulic controls from saw to splitter.

SPECIFICATIONS

• 35 HP Briggs & Stratton with Electric Start
• Tandem Hydraulic Pump - 22/4.5 GPM
• 28 Gallon Hydraulic Reservoir with Sight & Temp Gauge
• 4" x 24" Splitting Cylinder
• 23" Bar and .063" Gauge, 3/8" Chain
• 23" Maximum Log Diameter
• Automatic Electric Saw Chain Lubrication
• Up to 16' Length of Log *
• 12' In-Feed Hydraulic Chain Log Deck
• Adjustable Hydraulic Four-way Wedge
• Hydraulic Log Clamp & Saw Sweep
• Firewood Cut-off Lengths, Adjustable in 2" Increments, 12" to 24"
• Integrated Trash Rack

OPTIONS

• 40 HP Briggs & Stratton, EFI/ETC
• * 2' In-Feed Extension
• Hydraulic Log Loader
• Splitter Auto-cycle
• Double Joy Sticks
• Triple Hydraulic Pump with Oil Cooler
• Hydraulic Oil Cooler
• Hydraulic Log Stop
• 36" Firewood Cut-off Length
• Six-way Wedge
• Live Log Deck, 6' x 6' attached or 8', 10' or 12'- Stand alone
• Attached Out-feed Conveyor 12' or 14'
• Torsion Axle
• Lights / Electric Brakes
• Operators Seat



2500 Processor is shown with optional attached live deck and hydraulic log stop.

MODEL 2250

22 HP Honda engine, 23" maximum log diameter — built for bigger wood, with a 12' hydraulic chain in-feed log deck.

SPECIFICATIONS

• 22 HP Honda Engine with Electric Start - GX690
• Tandem Hydraulic Pump - 19/13 GPM
• 17 Gallon Hydraulic Reservoir with Sight & Temp Gauge
• 4" x 24" Splitting Cylinder
• 24" Bar and .058" Gauge, 3/8" Chain
• 23" Maximum Log Diameter
• Automatic Electric Saw Chain Lubrication
• Up to 16' Length of Log *
• 12' In-Feed Hydraulic Chain Log Deck
• Adjustable Hydraulic Four-way Wedge
• Hydraulic Saw
• Firewood Cut-off Lengths, Adjustable in 2" Increments, 12" to 24"
• Integrated Trash Rack

OPTIONS

• * 2' In-Feed Extension - (Supports logs up to 20' long with butt end on the deck)
• Hydraulic Log Loader
• 36" Firewood Cut-off Length
• Hydraulic Log Clamp & Saw Sweep
• Splitter Auto-cycle
• Six-way Wedge
• Live Log Deck, 6'x 6' attached or 8', 10' or 12' - Stand alone
• Attached Out-feed Conveyor 12' or 14'
• Triple Hydraulic Pump with Oil Cooler
• Hydraulic Oil Cooler
• Torsion Axle
• Hydraulic Log Stop
• Double Joy Sticks
• Lights/Electric Brakes



2250 Processor is shown with optional attached live deck, hydraulic log stop and attached conveyor.

MODEL 2000B-XL

22 HP Honda engine, 18" maximum log diameter — the mid-range workhorse, with automatic saw chain lubrication standard.

SPECIFICATIONS

• 22 HP Honda Engine with Electric Start - GX690	• Tandem Hydraulic Pump - 19/13 GPM	• 17 Gallon Hydraulic Reservoir with Sight & Temp Gauge	• 4" x 24" Splitting Cylinder	• 20" Bar and .058" Gauge, 3/8" Chain	• 18" Maximum Log Diameter	• Automatic Electric Saw Chain Lubrication	• Up to 16' Length of Log	• 11' x 11.25" In-Feed Belt	• Adjustable Hydraulic Four-way Wedge	• Hydraulic Saw	• 4' Extension Roller (Supports logs up to 16' long with butt end on the deck)	• Firewood Cut-off Lengths, Adjustable in 2" increments, 12" to 24"	• Integrated Trash Rack
--	-------------------------------------	---	-------------------------------	---------------------------------------	----------------------------	--	---------------------------	-----------------------------	---------------------------------------	-----------------	--	---	-------------------------

OPTIONS

• Hydraulic Log Loader	• 36" Firewood Cut-off Length	• Hydraulic Log Clamp & Saw Sweep	• Splitter Auto-cycle	• Six-way Wedge	• Live Log Deck, 6' x 6', 8', 10' or 12' - Stand alone	• Attached Out-feed Conveyor 12'
------------------------	-------------------------------	-----------------------------------	-----------------------	-----------------	--	----------------------------------



2000B-XL Processor is shown with optional hydraulic log loader and conveyor.

MODEL 1500-XL

13 HP Honda engine, up to 16' length of log — a step up in capacity with a dedicated in-feed belt conveyor.

SPECIFICATIONS

• 13 HP Honda Engine with Electric Start - GX390
• Tandem Hydraulic Pump - 2 Stage 14/12 GPM
• 10 Gallon Hydraulic Reservoir with Sight & Temp Gauge
• 3 1/2" x 24" Splitting Cylinder
• 18" Bar and .058" Gauge, 3/8" Chain
• 16" Maximum Log Diameter
• Gravity-Feed Saw Chain Lubrication
• Up to 10' Length of Log *
• 8' x 9.5" In-Feed Belt Conveyor
• Adjustable Hydraulic Four-way Wedge
• Hydraulic Chain Saw
• Firewood Cut-off Lengths, Adjustable in 2" Increments, 12" to 24"
• Integrated Trash Rack

OPTIONS

• Electric Start
• 2' In-Feed Extension
• Hydraulic Log Loader
• 36" Firewood Cut-off Length
• Hydraulic Log Clamp & Saw Sweep
• * 4' Extension Roller (Supports logs up to 16' long with butt end on the deck)
• Live Log Deck, 6' x 6', 8', 10' or 12' - Stand alone
• Attached Out-feed Conveyor 10'

1500-XL Processor is shown with optional hydraulic live deck and attached conveyor.



MODEL 1250

13 HP Honda engine, 16" maximum log diameter — the entry point into the Blacks Creek processor lineup. Small footprint, built for hard work.

SPECIFICATIONS

• 13 Honda Engine - GX390
• Hydraulic Pump - 12.7 GPM
• 10 Gallon Hydraulic Reservoir with Sight & Temp Gauge
• 3 1/2" x 24" Splitting Cylinder
• 18" Bar / 3/8" x .058" Gauge Chain
• 16" Maximum Log Diameter
• Gravity-Feed Saw Chain Lubrication
• 8' Length of Log *
• 7' In-Feed Log Deck
• Adjustable Hydraulic Four-way Wedge
• Firewood Cut-off Lengths, Adjustable in 2" Increments, 12" to 24"

OPTIONS

• Electric Start
• Hydraulic Log Loader
• * 4' Extension Roller (Supports logs up to 16' long with butt end on the deck)
• Log Deck 5'
• Live Log Deck, 6' x 6', 8', 10' or 12' - Stand alone models
• Attached Out-feed Conveyor 8'
• Model 1250 Skid Steer or 3-Point Hitch



1250 Processor is shown with optional hydraulic log loader and attached 8' out-feed conveyor.

MODEL COMPARISONS AT A GLANCE

A quick side-by-side of every processor in the lineup. Chart does not include available options — see individual model pages for full specifications.



*Blacks Creek rates its processors on the average production of a skilled operator. Operation in optimal conditions would increase production.

Processors shown with options

MODEL	ENGINE	BAR LENGTH	MAX LOG DIAMETER	MAX LOG LENGTH	IN-FEED DECK LENGTH	WEDGE SIZE	CORDS/HOUR 128 CUBIC FT
1250	13HP Honda	18"	16"	8'	7' Tray	Adj. 4-way Hydraulic	2/3 Cords
1500-XL	13HP Honda	18"	16"	8' - 10' *Up to 16'	8' x 9" Belt *11' Optional	Adj. 4-way Hydraulic	1 Cords
2000B-XL	22HP Honda	20"	18"	16'	11' x 11.25" Belt	Adj. 4-way Hydraulic	1-1/3 Cords
2250	22HP Honda	24"	23"	16'	12' Chain	Adj. 4-way Hydraulic	1-1/3 Cords
2500	35HP Briggs & Stratton	23"	23"	16' *Up to 20'	12' Chain *14' Optional	Adj. 4-way Hydraulic	1-1/2 Cords
3000	49HP Doosan Diesel Engine	25"	25"	22'	16' Chain	Adj. 4-way Hydraulic	2 Cords
							*8-way Optional
							*6-way Optional

Blacks Creek Innovations Inc. does not warranty that it's machines meets any requirements of any states, provinces, or other jurisdiction regarding any safety codes. The purchaser assumes all risk and liability in the use of this machine.



BLACKS CREEK

Family Owned • Canadian Made

PRODUCT CATALOGUE

355 Development Drive, Prescott, Ontario K0E 1T0

888-989-3717

blackscreek.ca

2026/2027